

## Transparent LED Display Parameter

Category						
Piksel Aralığı (MM) Pixel Pitch (MM)	P2.8-5.6	P3.1-3.1	P3.91-3.91	P3.91-7.81	P10.4	P15.625
Piksel yoğunluğu Physical Density	61952	160,000	111,111	62,500	40,000	27,777
LED tür LED type	SMD2020	SMD2121	SMD2121	SMD2121	SMD2121	SMD3528
(MM×MM) Module Size	500×125	500×125	500×125	500×125	500×125	500×125
(PX×PX) Module Resolution	178×22	162×32	128×128	128×16	48×12	32×8
Geçirgen -liği Transparent Rate	50%	50%	50%	65%	75%	83%
Ekran parlaklığı (CD/M <sup>2</sup> ) Brightness	≥600-5500 Customize					
Gri Ölçek Grey Scale	14bit					
(Hz) Refresh Rate	1920Hz/3840Hz Optional					
(W/M <sup>2</sup> ) Average Power Consumption/M <sup>2</sup>	150W					
(MM×MM) Cabinet Size	1000×1000	1000×750	1000×1000	1000×1000	1000×1000	1000×1000
(Kg) Cabinet Weight	7.5	6	7.5	9	9	9
Cabinet Material	Aluminum					
(V) Input Voltage	AC 110V~220V +/-10%					
Protection Level	IP43					

## PROJECT CASES

P3.91-7.8  
Curved  
design  
screen




High  
Transparent  
Rate



Front  
and  
Back  
side



Cylindrical  
Screen

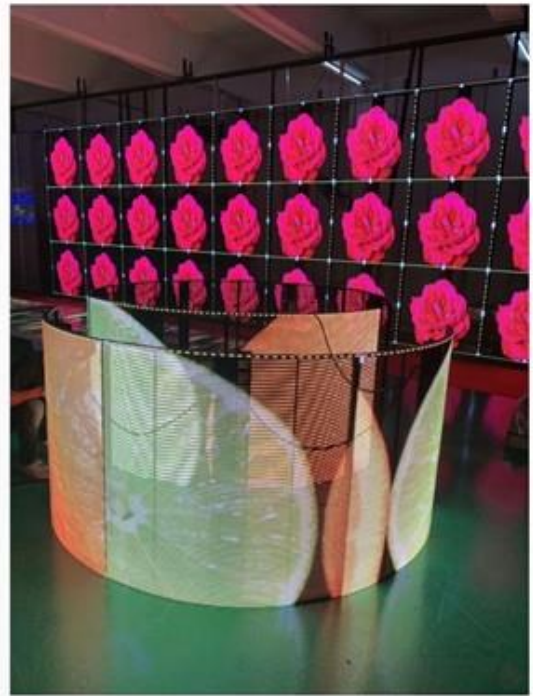



Turn off Power


Turn On Screen




Size  
1000x1000mm  
1000x500mm  
1000x750mm  
Customize



Curve  
Structure

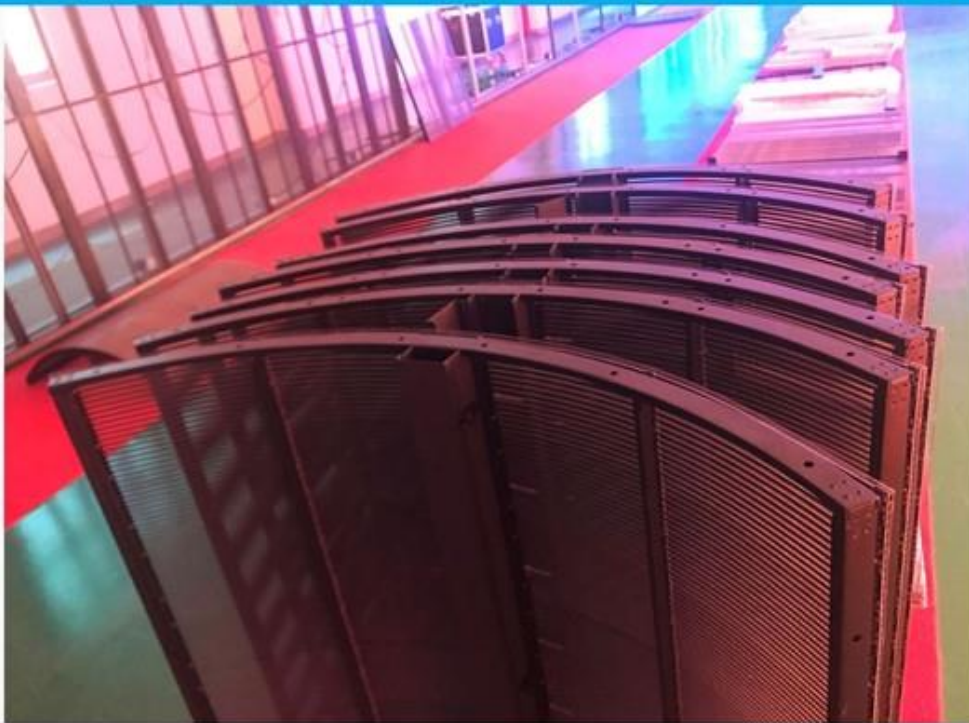

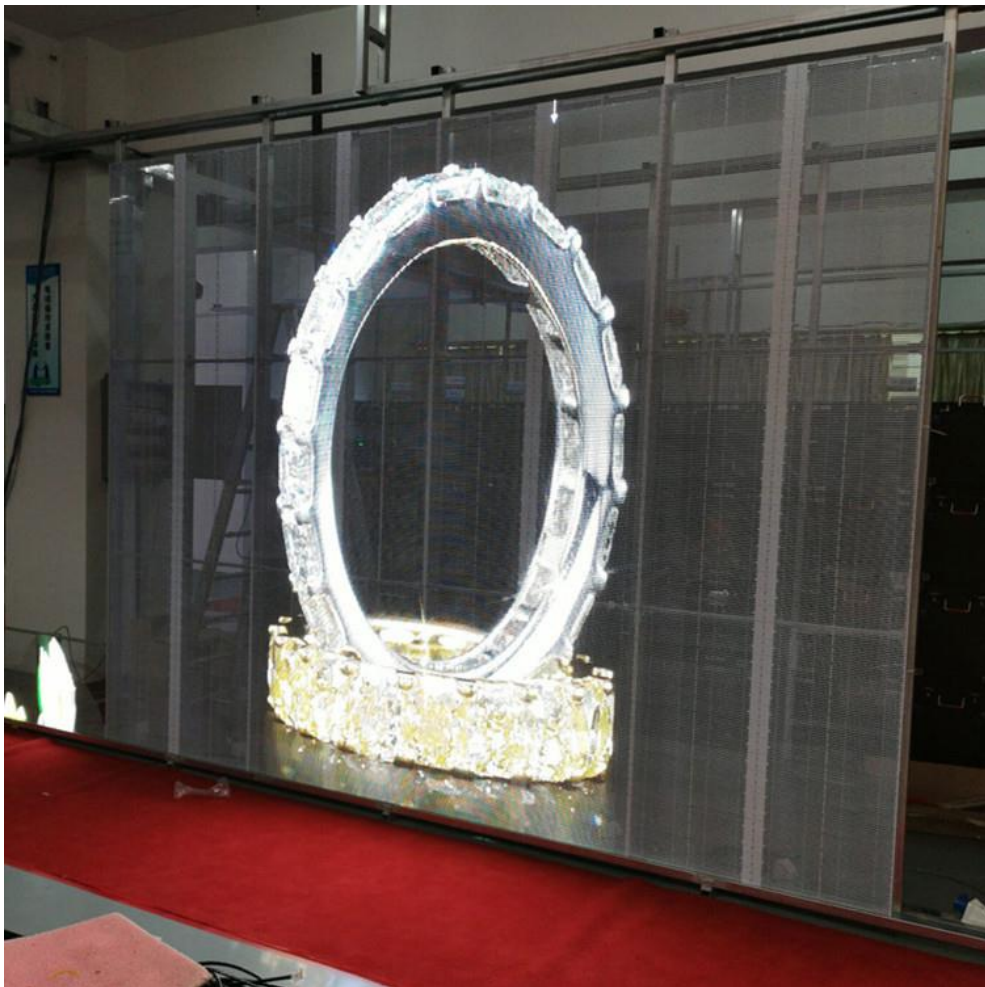

# Install Method

1.Hanging

2.Fixed install

3Magnetic Suction installation

